
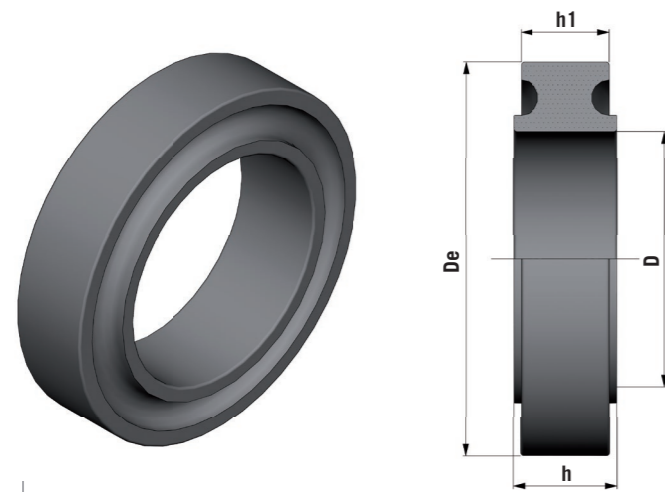


RULLI CON ANELLI D'IMPATTO

ROLLERS WITH IMPACT MOLDED ROLLS

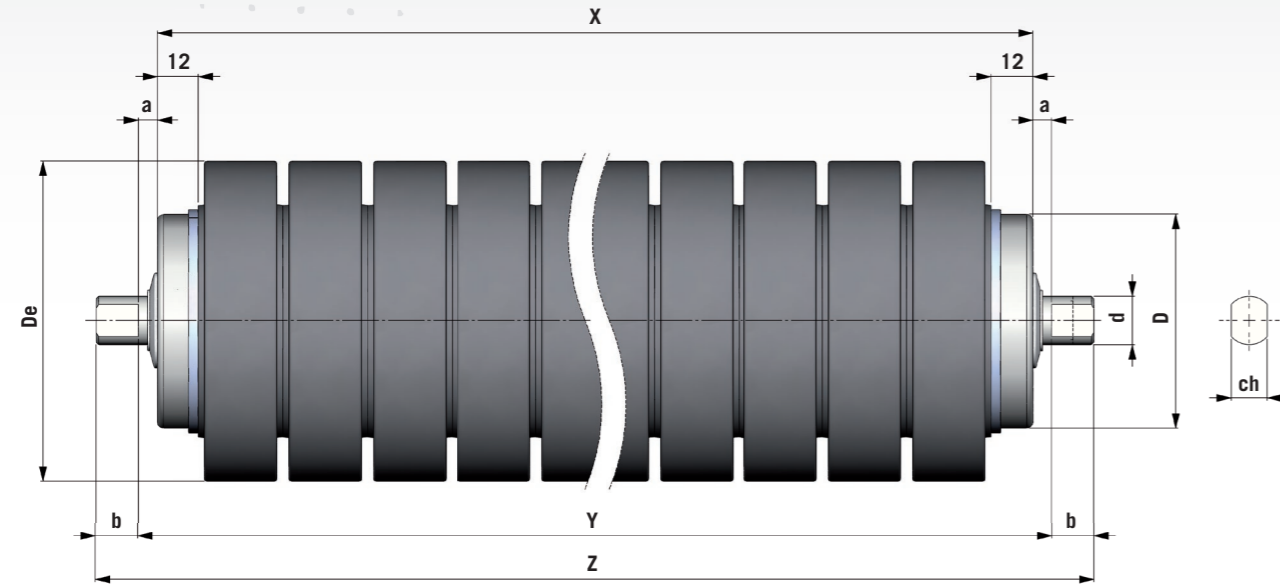

Anello d'impatto
Molded roll

RULLI CON ANELLI D'IMPATTO

ROLLERS WITH IMPACT MOLDED ROLLS

TIPO - TYPE	ESEC. ASSE SHAFT CONFIG.	DIMENSIONI - DIMENSIONS						PESO (KG) - WEIGHT (KG)	
		a	b	ch	De	D	d	X=200	Al mm - Per mm
SIGMA A.I. 89-60/15	A	4	9	14-15-17	89	60	20	2,291	0,01145
SIGMA A.I. 102-60/15	A	4	9	14-15-17	102	60	20	2,724	0,01362
SIGMA A.I. 108-60/15	A	4	9	14-15-17	108	60	20	2,791	0,01395
OMEGA A.I. 89-60/20	A	4	9	14-15-17	89	60	20	2,497	0,01248
OMEGA A.I. 108-60/20	A	4	9	14-15-17	108	60	20	2,997	0,01498
OMEGA A.I. 133-89/20	A	4	9	14-15-17	133	89	20	3,862	0,01931
OMEGA A.I. 89-60/25	A	4	9	18	89	60	25	2,568	0,01284
OMEGA A.I. 102-60/25	A	4	9	18	102	60	25	3,001	0,01501
OMEGA A.I. 108-60/25	A	4	9	18	108	60	25	3,068	0,01534
OMEGA A.I. 133-89/25	A	4	12	18	133	89	25	4,352	0,02176
OMEGA A.I. 159-102/25	A	4	12	18	159	102	25	5,242	0,02621
OMEGA A.I. 133-89/30	A	4	12	22	133	89	30	5,173	0,02586
OMEGA A.I. 159-102/30	A	4	12	22	159	102	30	6,093	0,03046

ANELLI DI IMPATTO A.I. MOLDED ROLLS

TIPO - TYPE	DIMENSIONI - DIMENSIONS				PESO (KG) - WEIGHT (KG)
	De	D	h	h1	UNIT. - UNIT.
A.I. 89-60	89	60	25	20	0,075
A.I. 102-60	102	60	30	25	0,155
A.I. 108-60	108	60	30	25	0,165
A.I. 133-89	133	89	35	30	0,250
A.I. 159-102	159	102	40	35	0,410

DATI PER STAZIONI SUPERIORI A TERNA DATA FOR 3 ROLL TROUGH UPPER STATIONS

LARGHEZZA DEL NASTRO BELT WIDTH	500	600	650	700	800	900	1000	1200	1400	1600	1800	2000
LUNGHEZZA DEI RULLI ROLLER LENGTH	X=200	235	250	265	315	350	380	465	530	600	670	750
TIPO - TYPE	PESO DELLA GOMMATURA CON A.I. (Kg) - WEIGHT OF RUBBER WITH M.R. (Kg)											
A.I. 89-60	0,600	0,750	0,750	0,825	0,975							
A.I. 102-60	1,085	1,240	1,395	1,395	1,705							
A.I. 108-60	1,155	1,320	1,485	1,485	1,815	1,980	2,145					
A.I. 133-89	1,500	1,750	2,000	2,000	2,250	2,500	2,750	3,500	4,000			
A.I. 159-102	2,050	2,460	2,870	2,870	3,280	3,690	4,100	4,920	5,740	6,150	6,970	7,790