
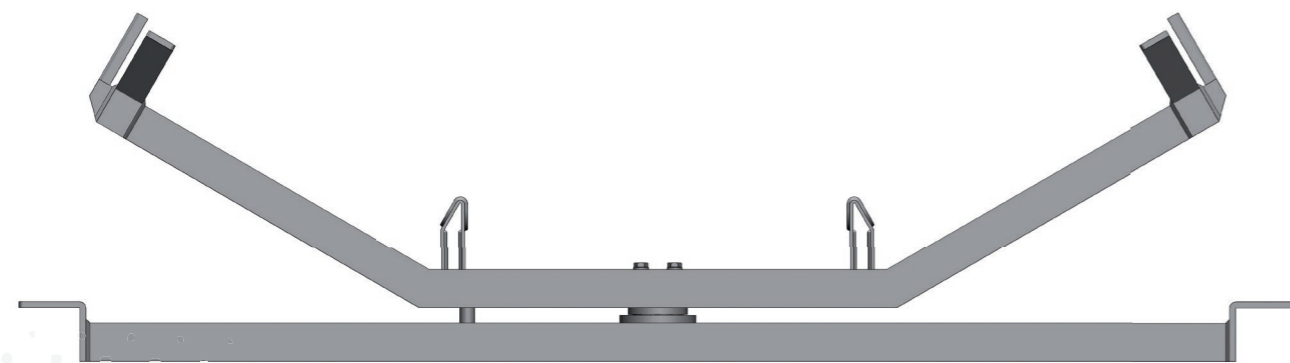


## STAZIONI A TERNA 3-ROLL TROUGHER STATIONS

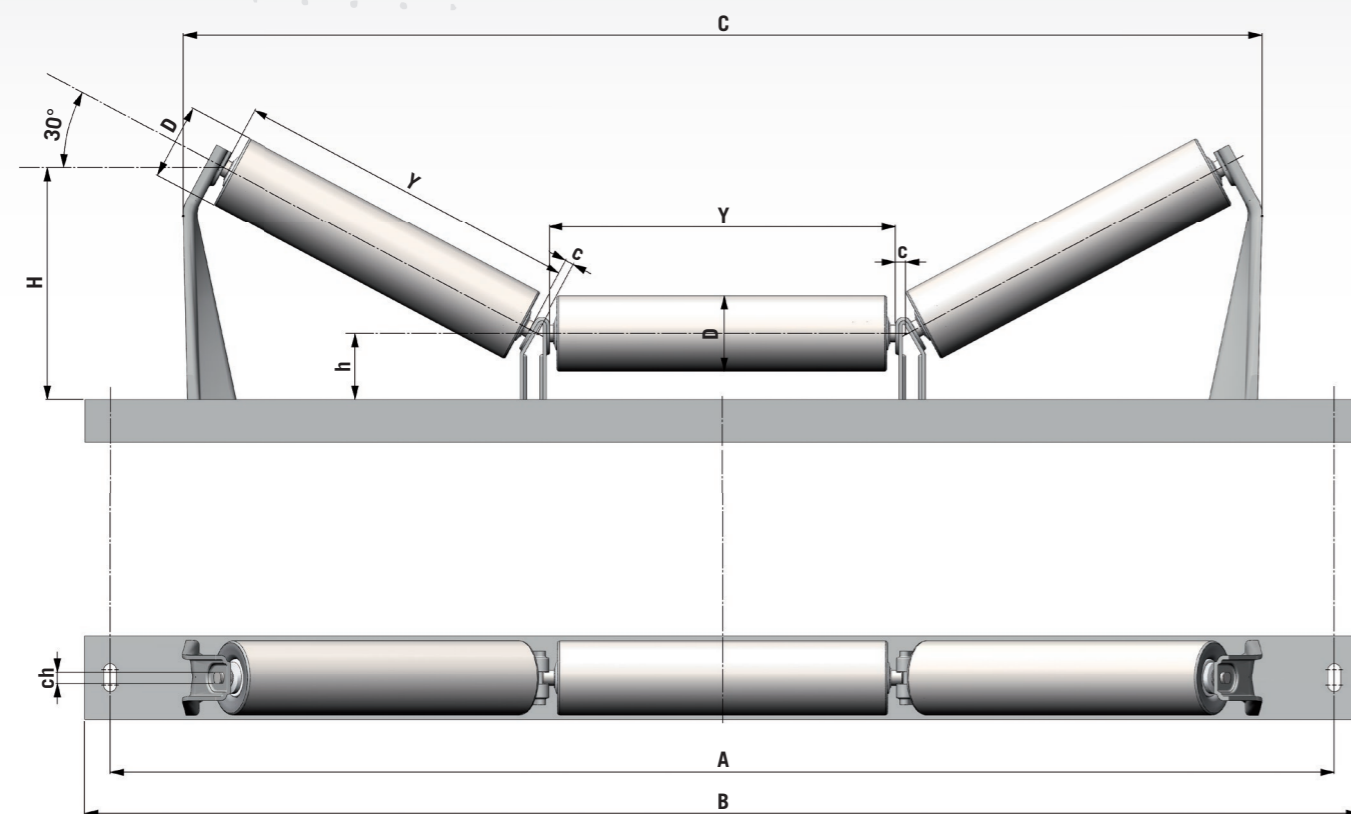

**SUPPORTI SERIE 500 Vedi pag. 284**  
 SUPPORT SERIES 500 See pag. 284

TIPO TYPE	DIMENSIONI - DIMENSIONS		
	D max rulli Max D Rollers	h	c
500.1	108-15 / 108-20	80	14
500.11	133-20	100	19
500.2	133-25 / 133-30	100	19
500.21	159-25 / 159-30	120	22

**SUPPORTI SERIE 700 Vedi pag. 288**  
 SUPPORT SERIES 700 See pag. 288

TIPO TYPE	DIMENSIONI - DIMENSIONS
	D max rulli Max D roller
700.1	108-15 / 108-20
700.11	133-20
700.2	133-25 / 133-30
700.21	159-25 / 159-30

## STAZIONI A TERNA 3-ROLL TROUGHER STATIONS

LARGHEZZA DEL NASTRO BELT WIDTH		500	600	650	700	800	900	1000	1200	1400	1600	1800	2000
TIPO - TYPE	DIMENSIONI - DIMENSIONS												
700.1	H	191	209	216	224	249	266	281	324	356	-	-	-
	Peso (Kg) Weight (Kg)	0,580	0,680	0,700	0,740	0,870	0,930	0,980	1,250	1,460	-	-	-
700.11	H	-	-	239	247	272	289	304	347	379	414	-	-
	Peso (Kg) Weight (Kg)	-	-	0,830	0,860	0,940	0,990	1,080	1,350	1,560	1,790	-	-
700.2	H	-	-	-	-	272	289	304	347	379	414	-	-
	Peso (Kg) Weight (Kg)	-	-	-	-	1,500	1,580	1,730	2,160	2,490	2,870	-	-
700.21	H	-	-	-	-	-	-	325	368	400	435	470	510
	Peso (Kg) Weight (Kg)	-	-	-	-	-	-	1,970	2,400	2,720	3,100	3,480	3,920

**STAZIONI A TERNA CON SUPPORTI SERIE 700 E 500 3 ROLL TROUGHER WITH SUPPORT SERIES 700 AND 500**

LARGHEZZA DEL NASTRO BELT WIDTH	RULLI ROLLERS	STAZIONE STATIONS	h = 80 c = 14 max. 108-15 / 108-20		h = 100 c = 19 max. 133-20		h = 100 c = 19 max. 135-25 / 133-30		h = 120 c = 22 max. 159-25 / 159-30		
			Y	A	B	C	H	C	H	C	H
			mm	mm	mm	mm	mm	mm	mm	mm	mm
500	208	740	800	727	191	759	-	-	-	-	-
600	243	840	900	823	209	855	-	-	-	-	-
650	258	890	950	864	216	896	239	-	-	-	-
700	273	940	1000	905	224	937	247	-	-	-	-
800	323	1090	1150	1042	249	1074	272	1082	272	-	-
900	358	1190	1250	1137	266	1169	289	1177	289	-	-
1000	388	1290	1350	1219	281	1251	304	1259	304	1292	325
1200	473	1540	1600	1451	324	1483	347	1491	347	1524	368
1400	538	1740	1800	1629	356	1661	379	1669	379	1702	400
1600	608	1940	2000	-	-	1853	414	1861	414	1892	435
1800	678	2140	2200	-	-	-	-	-	-	2084	470
2000	758	2340	2400	-	-	-	-	-	-	2302	510